




Overhead View For Positioning Park Bench Legs  
Diagram #1

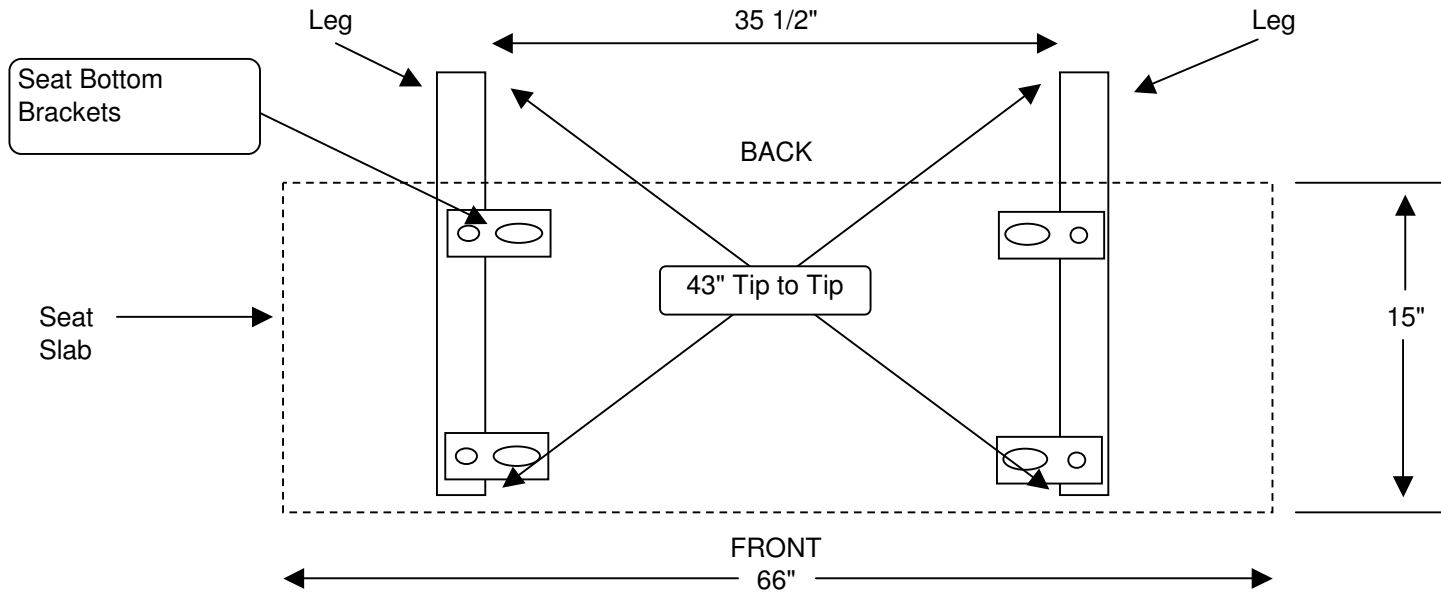

Side View of Bench Slab with 4 Threaded Rods Inserted  
Diagram #2

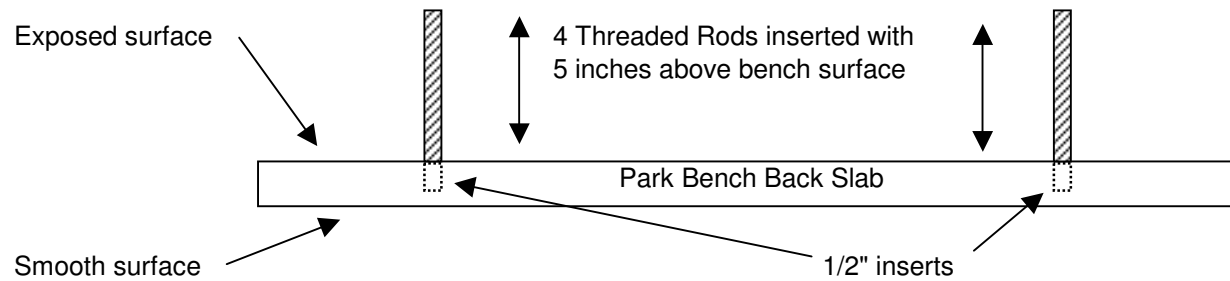

Parts List For Park Bench  
**Diagram 3**

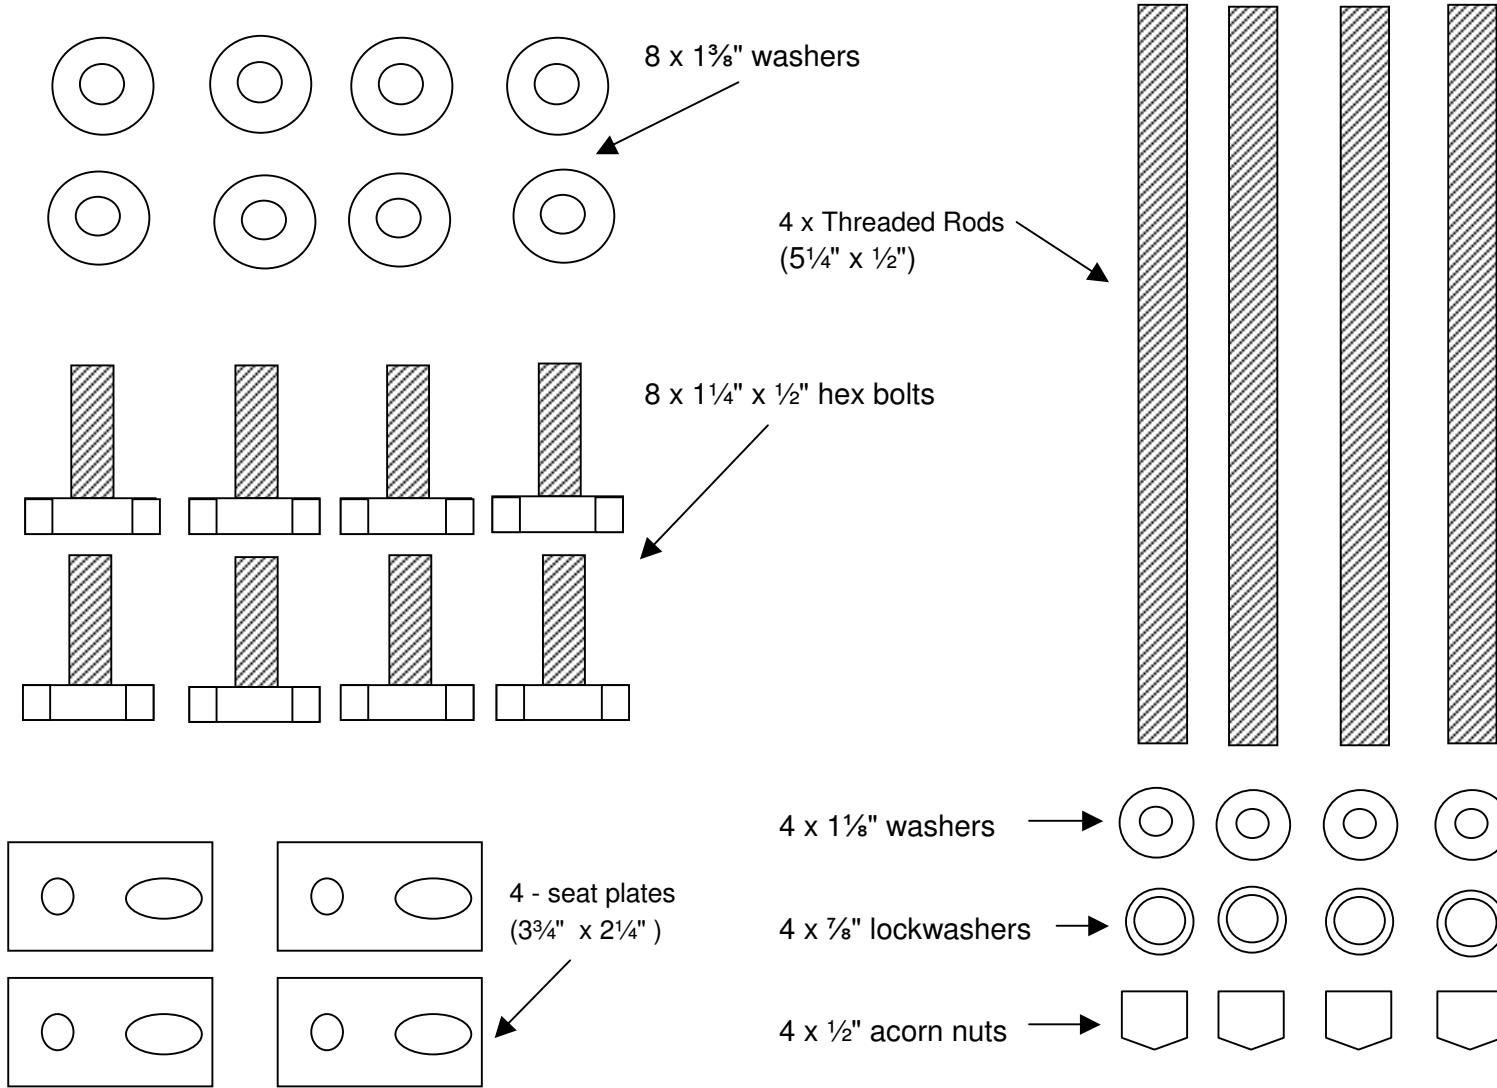

## Installation Instructions for GULL WING Park Benches



**Tools Required:** 3/4" socket wrench. 2 People.

**\*\* Note: Handle ALL concrete parts carefully. \*\***

**(Bumping pieces together may cause chips and cracks.)**

<b>Step 1</b>	Bolt 4 seat plates to legs using 1 1/4" bolts and 1 3/8" washers.
<b>Step 2</b>	Place the legs 35 1/2" apart, from inside edge to inside edge. Make sure the legs are square by measuring from the back tip of 1 leg to the front tip of the opposite leg, it should be 43". <b>See diagram 1. <u>This step is very important</u></b> otherwise the bench will not fit together properly.
<b>Step 3</b>	Position the seat onto the legs and start, <b><u>but do not tighten 4 bolts</u></b> (1 and 1/4") and 4 washers (1 and 3/8").
<b>Step 4</b>	Turn the back over face down (on packing foam to avoid scratching) and insert 4 threaded rods into the inserts so that there is 5" protruding from the concrete surface. <b>See diagram 2.</b>
<b>Step 5</b>	Carefully "hang" the back onto the bench legs through the holes in the legs. Be careful not to damage the threads on the threaded rods. Important to insert all 4 rods through the legs at the same time.
<b>Step 6</b>	Onto each of the 4 threaded rods, put 1 washer (1 1/8") followed by 1 lockwasher (7/8") and then 1 acorn nut (1/2").
<b>Step 7</b>	Tighten each acorn nut using a 3/4" socket wrench. Tighten until the back is flush with the leg. <b><u>Do not over tighten.</u></b>
<b>Step 8</b>	Align the seat so that the ends are in alignment with the back. Tighten the 4 bolts to the 4 plates. <b><u>Do not over tighten.</u></b>

**Highly recommended to apply fresh coat of sealer before each winter**

# Anchor Bracket Bolt Down Detail

